

## LDP...H100N 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

**NOTE:** The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

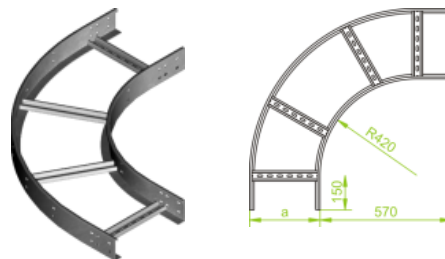

### Versions:

Sheet thickness: 1,5 mm

| Symbol      | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LDP200H100N | 200          | 499520           | 2               | 4,42         |
| LDP400H100N | 400          | 499540           | 2               | 5,69         |
| LDP500H100N | 500          | 499550           | 2               | 6,32         |
| LDP600H100N | 600          | 499560           | 2               | 7,32         |