


## KKL...H42 90° Horizontal Bend

### Overview:

**Application**  
Diversions in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

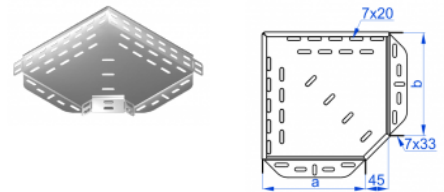

**For installation use Screw Sets SGK M6×10 or SG M6×10.**  
**In case of special orders please specify dimensions a and b.**

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKL50H42</b>	<b>50</b>	<b>142105</b>	<b>20</b>	<b>0,11</b>
<b>KKL100H42</b>	<b>100</b>	<b>142110</b>	<b>20</b>	<b>0,19</b>
<b>KKL150H42</b>	<b>150</b>	<b>142115</b>	<b>10</b>	<b>0,32</b>
<b>KKL200H42</b>	<b>200</b>	<b>142120</b>	<b>10</b>	<b>0,45</b>
<b>KKL300H42</b>	<b>300</b>	<b>142130</b>	<b>10</b>	<b>0,85</b>

### Connected products:

