


## KKJ...H42 90° Horizontal Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)  
**L-** powder coating in a full range of colours (PC)

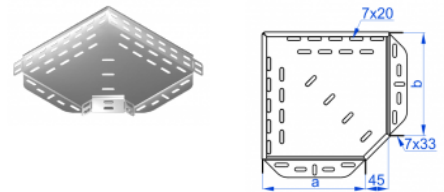

**For installation use Screw Sets SGK M6×10 or SG M6×10.**  
**In case of special orders please specify dimensions a and b.**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKJ50H42	50	145805	20	0,16
KKJ100H42	100	145810	20	0,27
KKJ150H42	150	145815	10	0,52
KKJ200H42	200	145820	10	0,66
KKJ300H42	300	145830	10	1,24
KKJ400H42	400	145840	10	1,60
KKJ500H42	500	145850	10	2,05
KKJ600H42	600	145860	10	2,60

### Connected products:

