


KKBL...H42 90° Horizontal Bend

Overview:

Application
Diversions in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

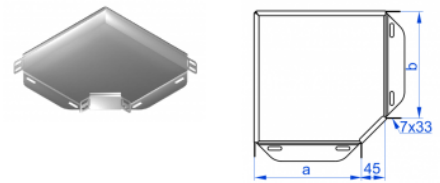

For installation use Screw Sets SGK M6×10 or SG M6×10.
In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKBL50H42	50	140101	20	0,11
KKBL100H42	100	140301	20	0,19
KKBL150H42	150	140501	10	0,32
KKBL200H42	200	140601	10	0,45
KKBL300H42	300	140801	10	0,85

Connected products:

