

WK... Cable Hanger

Overview:

Application

Suspending cables in Cable Ladders DKD, DKP, and DKC, fixed in the horizontal plane bottom to the wall.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

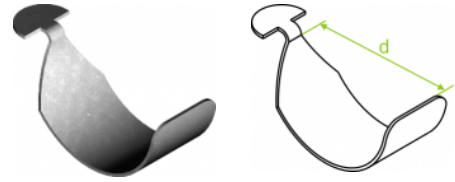

Versions:

Symbol	Catalogue number	Quantity in box	Weight 1 pc.	Size d [mm]
WK20	400100	100	0,02	20
WK25	400200	100	0,02	25
WK35	400300	100	0,02	35
WK40	400400	100	0,03	40
WK50	400500	100	0,04	50
WK60	400600	100	0,04	60