

## KKML...H30 45° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

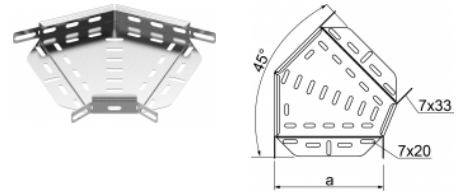

**For installation use Screw Sets SGK M6×10 or SG M6×10.**

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKML50H30	50	131505	20	0,05
KKML100H30	100	131510	20	0,11
KKML150H30	150	131515	10	0,17
KKML200H30	200	131520	10	0,23
KKML300H30	300	131530	10	0,48

### Connected products:



KGJ...H30 Cable Tray



KGR...H30 Cable Tray



KGL...H30 Cable Tray



KBJ...H30 Cable Tray



KBR...H30 Cable Tray