


KKMBJ...H42 45° Horizontal Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

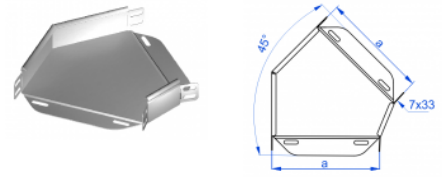

For installation use Screw Sets SGK M6×10 or SG M6×10.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBJ50H42	50	140104	20	0,11
KKMBJ100H42	100	140304	20	0,19
KKMBJ150H42	150	140504	10	0,36
KKMBJ200H42	200	140604	10	0,50
KKMBJ300H42	300	140804	10	0,87
KKMBJ400H42	400	147104	10	1,04
KKMBJ500H42	500	147204	10	1,22
KKMBJ600H42	600	147304	10	1,39

Connected products:

