

SLP... Rung

Overview:

Application

Used in DIY install of cable ladders together with cable ladder side walls;
at limited-access locations.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

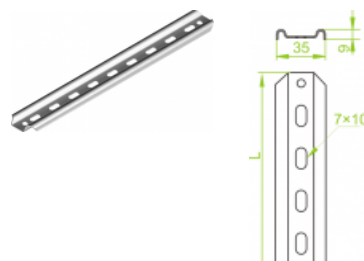

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight [1m]
SLP 100	95	404010	50	0,54
SLP 200	195	404020	50	0,54
SLP 300	295	404030	50	0,54
SLP 400	395	404040	50	0,54
SLP 500	495	404050	30	0,54
SLP 600	595	404060	30	0,54
SLP 800	795	404080	10	0,54
SLP1000	1000	404011	10	0,54
SLP1500	1500	404016	10	0,54
SLP2000	2000	404021	10	0,54