

## LUBJ...H42 90° Vertical Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

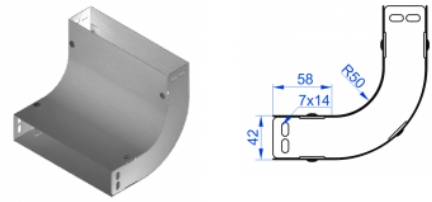

**For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUBJ50H42	50	141701	2	0,52
LUBJ100H42	100	141901	2	0,80
LUBJ150H42	150	142101	2	1,10
LUBJ200H42	200	142201	2	1,36
LUBJ300H42	300	142401	2	1,92
LUBJ400H42	400	147701	2	2,20
LUBJ500H42	500	147801	2	2,64
LUBJ600H42	600	147901	2	3,03

### Connected products:

