

DM...H55 Vertical Cable Ladder

Overview:

Application

Routing cable runs of various types in the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel to 3m lengths (SS)

L- powder coating in a full range of colours (PC)

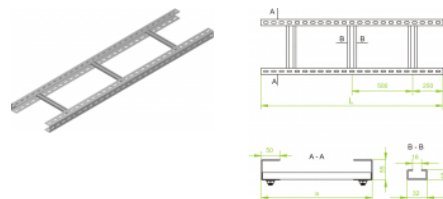

Versions:

Sheet thickness: **3,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
DM200H55/3	3000	200	404620	1	6,10
DM200H55/6	6000	200	404720	1	6,10
DM300H55/3	3000	300	404630	1	6,36
DM300H55/6	6000	300	404730	1	6,36
DM400H55/3	3000	400	404640	1	6,62
DM400H55/6	6000	400	404740	1	6,62
DM500H55/3	3000	500	404650	1	6,88
DM500H55/6	6000	500	404750	1	6,88
DM600H55/3	3000	600	404660	1	7,14
DM600H55/6	6000	600	404760	1	7,14
DM700H55/3	3000	700	404670	1	7,44
DM700H55/6	6000	700	404770	1	7,44
DM800H55/3	3000	800	404680	1	7,72
DM800H55/6	6000	800	404780	1	7,72
DM900H55/3	3000	900	404690	1	7,98
DM900H55/6	6000	900	404790	1	7,98
DM1000H55/3	3000	1000	404611	1	8,26
DM1000H55/6	6000	1000	404800	1	8,26

Connected products:



LC55H50 Channel
Connector



UK1/UKO1... Cable Clamp



UK2/UKO2... Cable Clamp



UT Fastening Bracket



UTM/UTMO Fastening
Bracket