


## KN Underfloor Trunking

### Overview:

**Application**  
Routing underfloor cable runs

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)

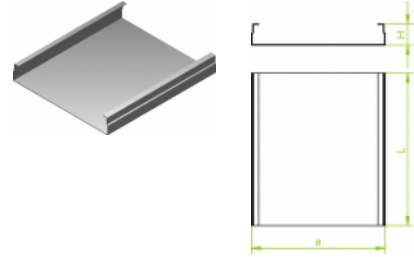

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KN 175H28/2	2000	175	520117	6	2,08	4700
KN 175H28/3	3000	175	520217	6	2,08	4700
KN 190H28/2	2000	190	520119	6	2,20	5120
KN 190H28/3	3000	190	520219	6	2,20	5120
KN 240H28/2	2000	240	520124	6	2,60	6520
KN 240H28/3	3000	240	520224	6	2,60	6520
KN 340H28/2	2000	340	520134	4	3,40	9320
KN 340H28/3	3000	340	520234	4	3,40	9320

### Connected products:

