


KNd Underfloor Trunking 2 Comp.

Overview:

Application
Routing underfloor cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)

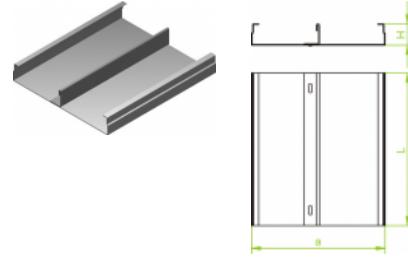

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNd 175H28/2	2000	175	520317	6	2,55	4700
KNd 175H28/3	3000	175	520417	6	2,55	4700
KNd 190H28/2	2000	190	520319	6	2,67	5120
KNd 190H28/3	3000	190	520419	6	2,67	5120
KNd 240H28/2	2000	240	520324	6	3,07	6520
KNd 240H28/3	3000	240	520424	6	3,07	6520
KNd 340H28/2	2000	340	520334	4	3,87	9320
KNd 340H28/3	3000	340	520434	4	3,87	9320

Connected products:

