

## KKNM 45° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing


**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

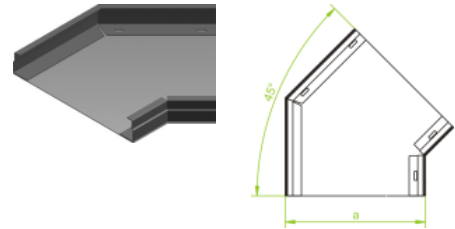

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKNM175H28</b>	<b>175</b>	<b>521017</b>	<b>4</b>	<b>0,53</b>
<b>KKNM190H28</b>	<b>190</b>	<b>521019</b>	<b>4</b>	<b>0,59</b>
<b>KKNM240H28</b>	<b>240</b>	<b>521024</b>	<b>4</b>	<b>0,76</b>
<b>KKNM340H28</b>	<b>340</b>	<b>521034</b>	<b>4</b>	<b>1,23</b>

### Connected products:

