


## KNd Underfloor Trunking 2 Comp.

### Overview:

**Application**  
Routing underfloor cable runs

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)

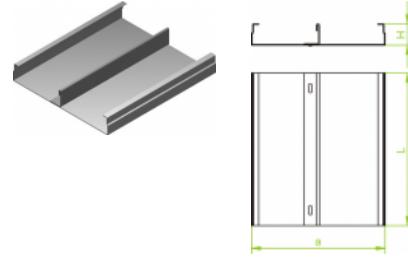

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNd 175H38/2	2000	175	530317	6	2,79	6450
KNd 175H38/3	3000	175	530417	6	2,79	6450
KNd 190H38/2	2000	190	530319	6	2,91	7020
KNd 190H38/3	3000	190	530419	6	2,91	7020
KNd 240H38/2	2000	240	530324	6	3,31	8920
KNd 240H38/3	3000	240	530424	6	3,31	8920
KNd 340H38/2	2000	340	530334	4	4,11	12720
KNd 340H38/3	3000	340	530434	4	4,11	12720

### Connected products:

