

LLJ...H42 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

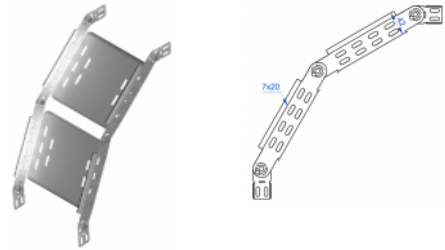

For installation use Screw Sets SGK M6×10 or SG M6×10.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors

6 sets of screws

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLJ50H42	50	146805	2	0,70
LLJ100H42	100	146810	2	0,86
LLJ150H42	150	146815	2	1,02
LLJ200H42	200	146820	2	1,20
LLJ300H42	300	146830	2	1,52
LLJ400H42	400	146840	2	1,74
LLJ500H42	500	146850	2	2,08
LLJ600H42	600	146860	2	2,46

Connected products:

