

LKd Vertical Bend 2 Comp.

Overview:

Application

Diversion in cable routing from the horizontal to the vertical plane

Material

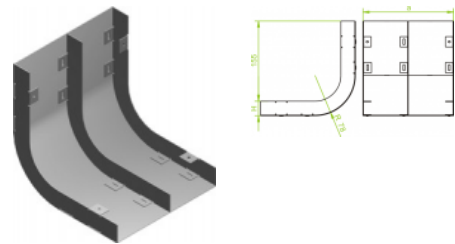
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

Cover included






Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKd 175H38	175	531617	4	0,81
LKd 190H38	190	531619	4	0,86
LKd 240H38	240	531624	4	1,00
LKd 340H38	340	531634	4	1,27

Connected products:

							
LKT Vertical Bend 3 Comp.	RKN Straight Reducer	RKND Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.	KN Underfloor Trunking	KND Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend
							
KKND 90° Horizontal Bend 2 Comp.	KKNT 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKND 45° Horizontal Bend 2 Comp.	KKNMt 45° Horizontal Bend 3 Comp.	TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend