


## KNt Underfloor Trunking 3 Comp.

### Overview:

**Application**  
Routing underfloor cable runs

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)

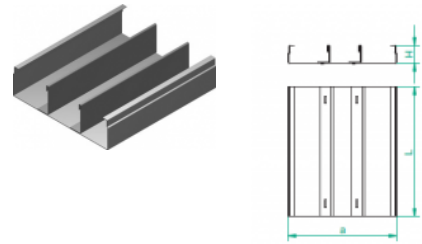

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
<b>KNt 175H48/2</b>	<b>2000</b>	<b>175</b>	<b>540517</b>	<b>6</b>	<b>3,64</b>	<b>8200</b>
<b>KNt 175H48/3</b>	<b>3000</b>	<b>175</b>	<b>540617</b>	<b>6</b>	<b>3,64</b>	<b>8200</b>
<b>KNt 190H48/2</b>	<b>2000</b>	<b>190</b>	<b>540519</b>	<b>6</b>	<b>3,76</b>	<b>8920</b>
<b>KNt 190H48/3</b>	<b>3000</b>	<b>190</b>	<b>540619</b>	<b>6</b>	<b>3,76</b>	<b>8920</b>
<b>KNt 240H48/2</b>	<b>2000</b>	<b>240</b>	<b>540524</b>	<b>6</b>	<b>4,16</b>	<b>11320</b>
<b>KNt 240H48/3</b>	<b>3000</b>	<b>240</b>	<b>540624</b>	<b>6</b>	<b>4,16</b>	<b>11320</b>
<b>KNt 340H48/2</b>	<b>2000</b>	<b>340</b>	<b>540534</b>	<b>4</b>	<b>4,96</b>	<b>16120</b>
<b>KNt 340H48/3</b>	<b>3000</b>	<b>340</b>	<b>540634</b>	<b>4</b>	<b>4,96</b>	<b>16120</b>

### Connected products:

