

## PTJ... Perforated Steel Band

### Overview:

#### Application

Suspending installation components, installing all range of cable grips. Used as an earthing element indoors


#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

L- powder coating in a full range of colours to 3m long (PC)

**Important! In case of large quantity orders cut-to-length services available for any sections up to 6m long.**

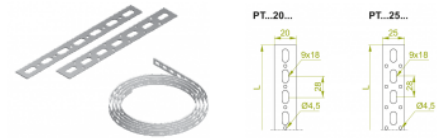

### Versions:

Sheet thickness: **1,0 mm**

| Symbol   | Width a [mm] | Catalogue number | Maximum load F <sub>max</sub> [kN] | Weight [1m] | Dĺžka rolky [m] |
|----------|--------------|------------------|------------------------------------|-------------|-----------------|
| PTJ20/25 | 20           | 640825           | 0,70                               | 0,12        | 25              |
| PTJ20/50 | 20           | 640850           | 0,70                               | 0,12        | 50              |
| PTJ25/25 | 25           | 640925           | 1,00                               | 0,15        | 25              |
| PTJ25/50 | 25           | 640950           | 1,00                               | 0,15        | 50              |

### Connected products:

