

PUC... Positioning Plate

Overview:

Application

Mutual positioning of channels when screwing them together

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

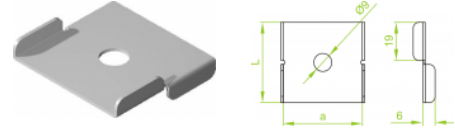

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PUC30	40	30	661203	100	0,03
PUC40	40	40	661204	100	0,04
PUC50	40	50	661205	100	0,04

Connected products:

