

CD40H20... Channel

Overview:

Application

Used for suspending lighting, and as construction element for installing cable trays, and ladders. Used as an element for supporting Brackets WS, WZS, WSZ, WWT, WPT, WWC, WPL, WTL, WW, WWS, WWD, WMC, WMCN, WWCN, and WWC.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel sections to 3m long (SS)

L- powder coating in a full range of colours (PC)

Important! In case of large quantity orders available are any sections to 6m long. For the assembly of channel in combination with channel connector use Screw Sets SGK M10x20 or SG M10x20

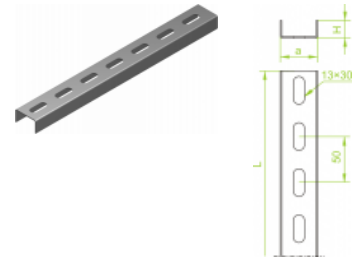

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CD40H20/2	2000	40	611620	8	20	1,46
CD40H20/3	3000	40	611630	8	20	2,19

Connected products:

