

ZC25H25... Z - Profile

Overview:

Application

Supporting installation accessories of electrical rack/sub-rack cabinets, enclosures, and cases both: in systems and stand-alone, and plug-in units

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

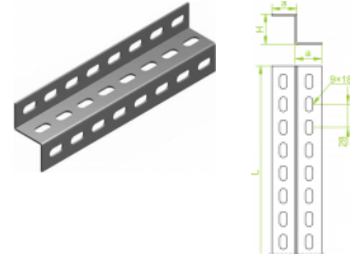

Important! In case of large quantity orders available are any sections to 3m long.

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
ZC25H25/2	2000	25	630220	10	25	1,70
ZC25H25/3	3000	25	630230	10	25	2,55

Connected products:

