

## CWP30H30... Support Channel

### Overview:

#### Application

Used for suspending lighting, and as an assembly element for installing cable trays, and ladders. Used as an element for supporting Brackets WW, WWS.


#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E**- stainless steel sections to 3m long (SS)  
**L**- powder coating in a full range of colours (PC)

**Important! In case of large quantity orders services available are any sections up to 6m long. For the assembly of support channel in combination with channel connector use Screw Sets SGK M8x14 or SG M8x14.**

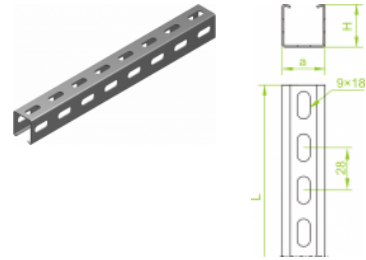

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CWP30H30/2	2000	30	613620	8	30	2,00
CWP30H30/3	3000	30	613630	8	30	3,00

### Connected products:

