

WMC/WMCO... Bracket

Overview:

APPLICATION

APPLICATION
Supporting cable trays and ladders, pipes, and other systems' components under very heavy load


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

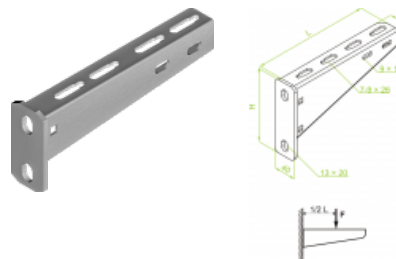

IMPORTANT! Non-standard lengths of brackets available to special order

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WMC/WMCO100	115	711110	50	95	0,22	3,80
WMC/WMCO150	165	711115	50	95	0,29	3,00
WMC/WMCO200	215	711120	50	95	0,36	3,50
WMC/WMCO300	315	711130	30	120	0,43	3,20
WMC/WMCO400	415	711140	30	120	0,83	3,10
WMC/WMCO500	515	711150	20	140	0,96	3,00
WMC/WMCO600	615	711160	20	140	1,15	2,60
WMC700	715	711170	4	140	1,87	2,00
WMC800	815	711180	4	155	2,27	1,90
WMC900	915	711190	4	155	2,51	1,80
WMC1000	1015	711111	4	155	2,75	1,70