

WS... Bracket

Overview:

Application

Supporting cable trays and ladders, pipes, and other systems' components

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

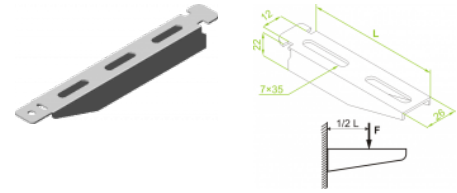

IMPORTANT! Non-standard lengths of brackets available to special order



Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WS50	60	710105	100	0,04	0,65
WS100	110	710110	50	0,07	0,60
WS150	160	710115	50	0,13	0,75
WS200	210	710120	50	0,17	0,60
WS300	310	710130	50	0,28	0,45
WS400	410	710140	30	0,35	0,35
WS500	510	710150	30	0,45	0,30