


WSN... Ceiling Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

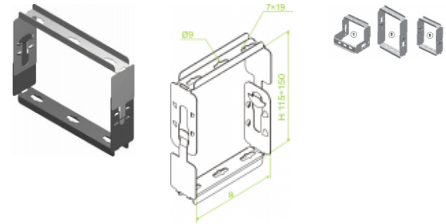

NOTE: Load given for two-point mounting

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load F _{max} [kN]
WSN50	60	730305	100	0,13	0,95
WSN100	110	730310	50	0,15	0,85
WSN150	160	730315	50	0,20	0,75
WSN200	210	730320	50	0,25	0,50