

WSD... Ceiling Bracket

Overview:

Application

Suspending cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

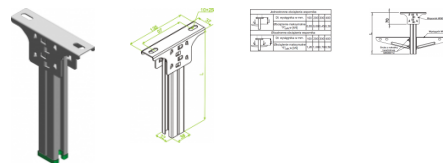

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.
WSD200	200	720520	20	0,52
WSD300	300	720530	20	0,69
WSD400	400	720540	20	0,86
WSD500	500	720550	20	1,04
WSD600	600	720560	20	1,21
WSD700	700	720570	8	1,38
WSD800	800	720580	8	1,56
WSD900	900	720590	8	1,73
WSD1000	1000	720511	8	1,90