

## ZKM... Beam Clamps Set


### Overview:

**Application**  
Suspending cable routes

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

**Beam Clamps Set ZKM includes:**  
- 2pcs of Beam Clamp KDM  
- proper-length section of Support Channel CWC40H22

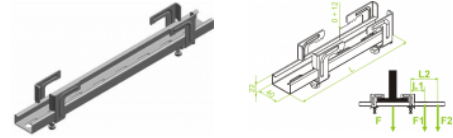

### Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]	Maximum load F1 [kN]	Maximum load F2 [kN]	A distance between the loaded area and the clamp L1	A distance between the loaded area and the clamp L1
ZKM150	150	751315	10	0,46	3,50	0,00	0,40	100	200
ZKM200	200	751320	10	0,53	3,00	0,00	0,40	100	200
ZKM250	250	751325	10	0,60	2,50	0,00	0,40	100	200
ZKM300	300	751330	10	0,66	2,25	0,00	0,40	100	200
ZKM350	350	751335	10	0,73	2,00	0,00	0,40	100	200
ZKM400	400	751340	10	0,80	1,75	0,00	0,40	100	200