


WKW...H42 Central Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

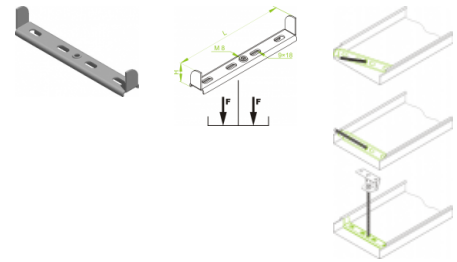

Possibility of tool free assembly (quick installation) to solid and perforated cable trays

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WKW50H42	41	28	731505	100	40	0,07	0,80
WKW100H42	91	28	731510	100	40	0,10	0,60
WKW150H42	141	28	731515	100	40	0,14	0,45
WKW200H42	191	28	731520	50	40	0,17	0,40
WKW300H42	291	28	731530	50	40	0,25	0,25

Connected products:



