


WKW...H100 Central Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

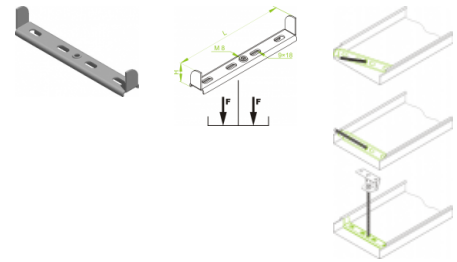

Possibility of tool free assembly (quick installation) to solid and perforated cable trays

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. | Maximum load Fmax[kN] |
|-------------------|--------------|--------------|------------------|-----------------|---------------|--------------|-----------------------|
| WKW100H100 | 91 | 28 | 731910 | 30 | 98 | 0,16 | 0,60 |
| WKW150H100 | 141 | 28 | 731915 | 30 | 98 | 0,20 | 0,45 |
| WKW200H100 | 191 | 28 | 731920 | 30 | 98 | 0,23 | 0,40 |
| WKW300H100 | 291 | 28 | 731930 | 30 | 98 | 0,31 | 0,25 |

Connected products:

