


## WSV... Bracket

### Overview:

**Application**  
Suspending cable routes.

**Material**  
Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

**Available to order:**  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

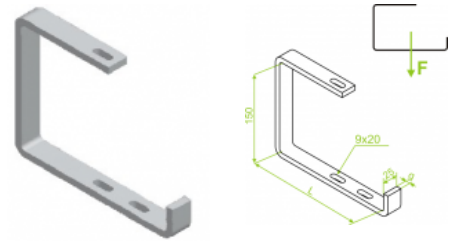

### Versions:

Symbol	Length L [m]	Sheet thickness [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
<b>WSV100</b>	<b>105</b>	<b>6</b>	<b>712210</b>	<b>30</b>	<b>0,39</b>	<b>0,60</b>
<b>WSV150</b>	<b>155</b>	<b>6</b>	<b>712215</b>	<b>20</b>	<b>0,48</b>	<b>0,45</b>
<b>WSV200</b>	<b>205</b>	<b>8</b>	<b>712220</b>	<b>20</b>	<b>0,75</b>	<b>0,40</b>
<b>WSV300</b>	<b>305</b>	<b>10</b>	<b>712230</b>	<b>10</b>	<b>1,26</b>	<b>0,30</b>
<b>WSV400</b>	<b>405</b>	<b>10</b>	<b>712240</b>	<b>10</b>	<b>1,55</b>	<b>0,25</b>