

OZS/OZSO Cable Hanger

Overview:


APPLICATION
Suspending cable routes

Material

Steel, strip-galv. acc. to the Sendzimir method
to PN-EN 10346:2011 (SG)

Available finishes:

E - stainless steel (SS)
PN-EN 10088 - only OZ/OZO

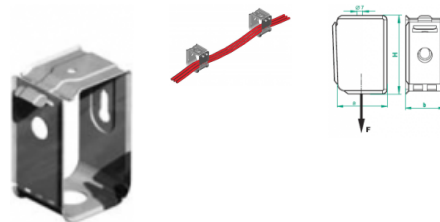

For the installation use the following bolt options:

- SROM6x30
- SBOM6x60
- KWBO6x35 or KWBO6x40
- GSO6x40
- PGM6... with TRSOM6

Safe working load: see Safe Loads Table

Standard spacing of supports: 0,3m

Upgraded standard of supports - 0.6m

Connected products:



OZ/OZO Cable
Hanger



OZM/OZMO Cable
Hanger



SBO... Concrete
Screw



SBSO... Concrete
Screw



KWBO... Nail
Anchor



GSO... Ceiling Nail



KSKO... Hollow -
Ceiling Anchor