


KKMPJ...H42 45° Horizontal Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

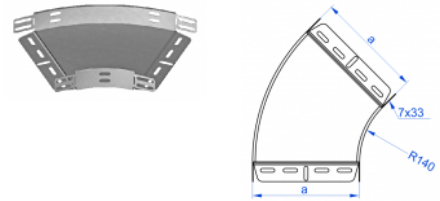

For installation use Screw Sets SGK M6×10 or SG M6×10.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ50H42	50	140914	20	0,19
KKMPJ100H42	100	141014	20	0,29
KKMPJ150H42	150	141114	10	0,40
KKMPJ200H42	200	141214	10	0,53
KKMPJ300H42	300	141314	10	0,83
KKMPJ400H42	400	141414	10	1,20
KKMPJ500H42	500	141514	10	1,62
KKMPJ600H42	600	141614	10	2,11

Connected products:

