


KDS/KDSO...H60 Wire Mesh Cable Tray

Overview:

APPLICATION
Cable routing.

MATERIAL
Electro-galvanised wire (EG)
Available finishes:
L - powder coating in a full range of colours (PC)

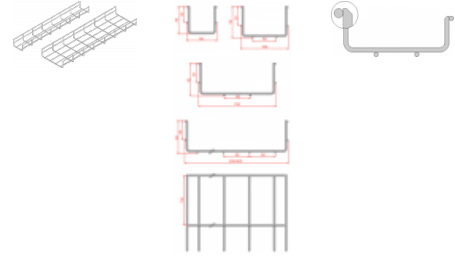

Max. safe load
KDS/KDSO60H60/3: 2 kg/m
KDS/KDSO100 - 600H60/3: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box
KDS/KDSO60H60/3	3000	60	970106	8
KDS/KDSO100H60/3	3000	100	970110	8
KDS/KDSO150H60/3	3000	150	970115	8
KDS/KDSO200H60/3	3000	200	970120	8
KDS/KDSO300H60/3	3000	300	970130	4
KDS/KDSO400H60/3	3000	400	970140	2
KDS/KDSO500H60/3	3000	500	970150	2
KDS/KDSO600H60/3	3000	600	970160	2

Connected products:



ZS/ZSO
Clamping Piece



WKS/WKS060
Side Holder



R01... Cable
Protection Piece



UPU Mounting
Plate



UPPO...
Mounting Plate



UKZ1/UKZ01...
Cable Clamp



USSPW/USSPW0
Joint Connector



USSN/USSO
Joint Connector



SGN Screw Set