

## KLL75H60 Cable Tray

### Overview:

#### APPLICATIONS

Installation of light systems.

#### MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304), (only 3m)

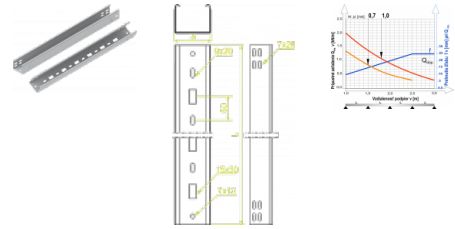

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
<b>KLL75H60/3</b>	<b>3000</b>	<b>75</b>	<b>160107</b>	<b>4</b>	<b>60</b>	<b>1,12</b>
<b>KLL75H60/6</b>	<b>6000</b>	<b>75</b>	<b>160207</b>	<b>4</b>	<b>60</b>	<b>1,12</b>

### Connected products:



PGM Threaded Rod



WLS Hanger



WSL75 Hanger



NS... Nut



LPLH60 Spojka žľabu