


KKBP...H50 90° Horizontal Bend

Overview:

Application
Diversions in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

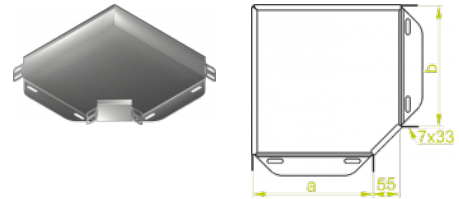


For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKBP50H50	50	150102	20	0,28
KKBP100H50	100	150202	20	0,56
KKBP150H50	150	150302	10	0,84
KKBP200H50	200	150402	10	1,18
KKBP300H50	300	150602	10	2,11
KKBP400H50	400	150702	10	3,10
KKBP500H50	500	150802	10	4,30
KKBP600H50	600	150902	10	5,71

Connected products:

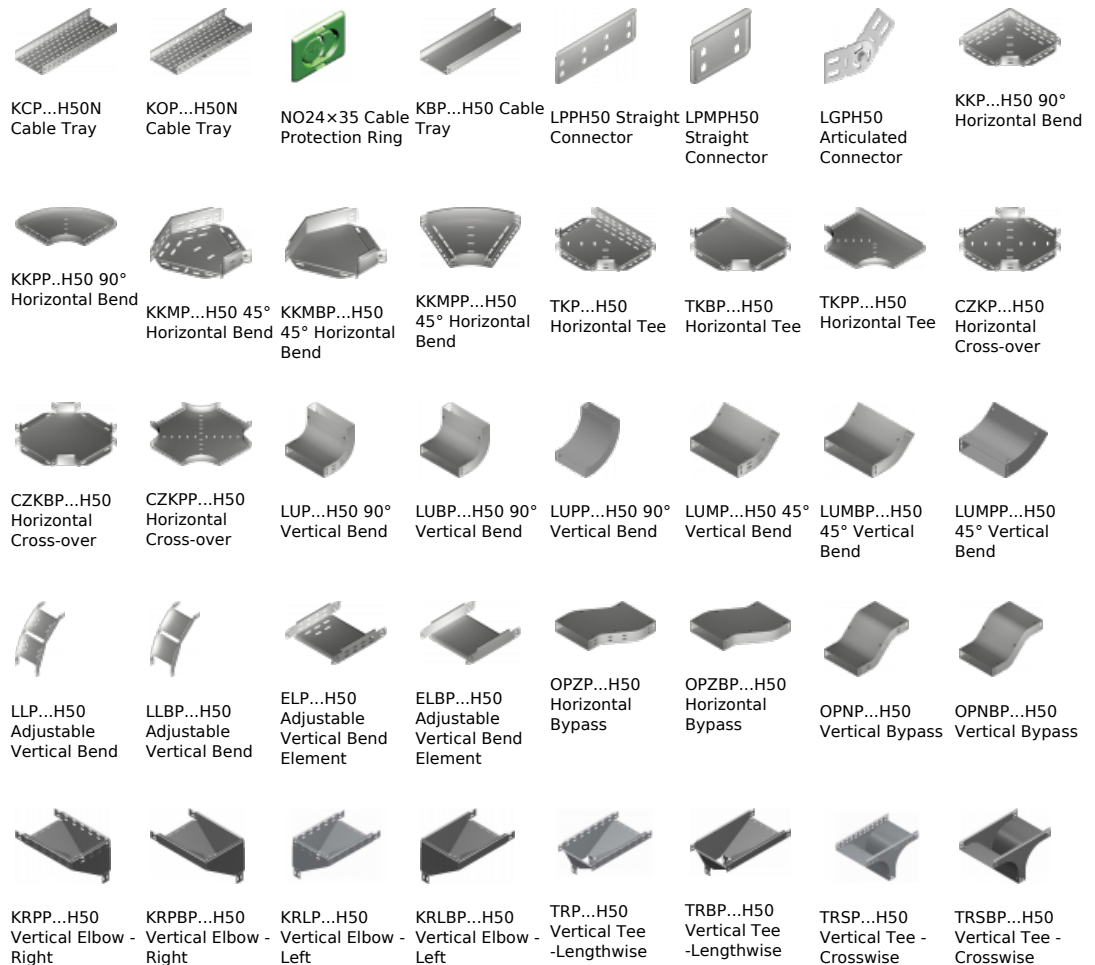

RKLP...H50 Left
ReducerRKLBP...H50 Left
ReducerRKPP...H50
Right ReducerRKPBP...H50
Right ReducerRKSP...H50
Straight
ReducerRKSBP...H50
Straight
ReducerTKDP...H50
Add-on TeeLRPPH50 Corner
Connector