

OPNJ...H50 Vertical Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)




For installation use Screw Sets SGK M6x12 or SG M6x12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNJ50H50	50	154505	2	0,55
OPNJ100H50	100	154510	2	0,81
OPNJ150H50	150	154515	2	1,07
OPNJ200H50	200	154520	2	1,33
OPNJ300H50	300	154530	2	1,87
OPNJ400H50	400	154540	2	2,39
OPNJ500H50	500	154550	2	3,13
OPNJ600H50	600	154560	2	3,47

Connected products:

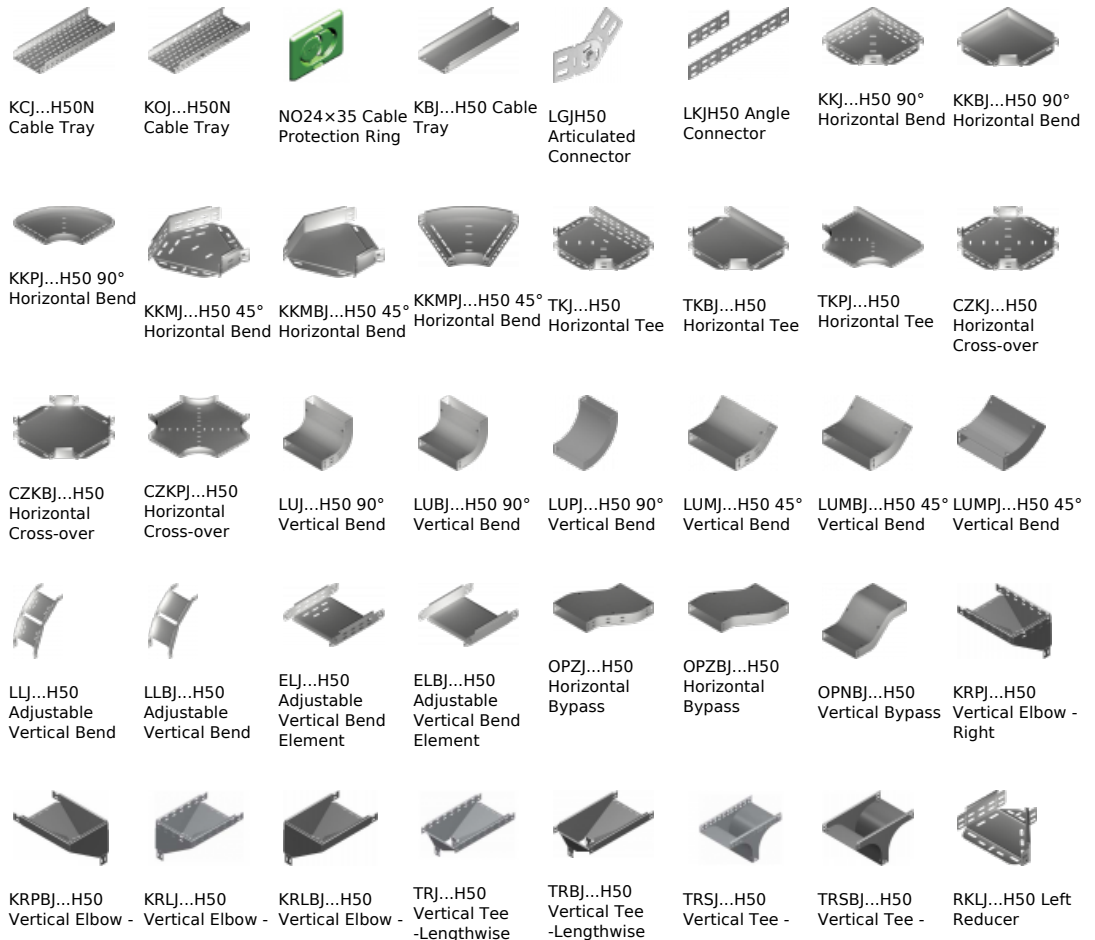

Right

RKLBJ...H50
Reducer

Left

RKPJ...H50
Reducer

Left

RKPBJ...H50
Right ReducerRKSJ...H50
Straight
ReducerRKSBJ...H50
Straight
Reducer

Crosswise

LRJH50 Corner
Connector

Crosswise

LRBJH50 Corner
ConnectorTKDJ...H50
Add-on TeeLRPJH50 Corner
Connector