

LPDC...H120N Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

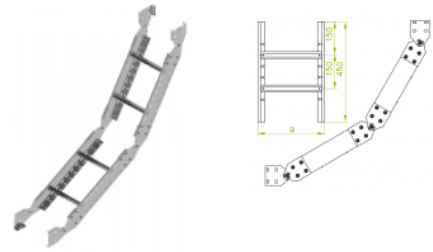

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDC100H120N	100	484910	2	8,91
LPDC200H120N	200	484920	2	9,42
LPDC300H120N	300	484930	2	9,95
LPDC400H120N	400	484940	2	10,70
LPDC500H120N	500	484950	2	10,95
LPDC600H120N	600	484960	2	11,47