

RDPC...H120N Right Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

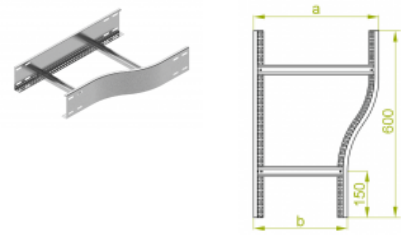

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDPC200/100H120 N	200	485510	2	3,22	100
RDPC300/200H120 N	300	485520	2	3,45	200
RDPC400/300H120 N	400	485530	2	3,69	300
RDPC500/400H120 N	500	485540	2	3,93	400
RDPC600/500H120 N	600	485550	2	4,14	500