

KCD...H50N Cable Tray

Overview:


Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connectorfree assembly.

Available when ordering in large quantity are 2m and 6m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.




Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KCD50H50/3N	3000	50	151205	12	1,49	2300
KCD100H50/3N	3000	100	151210	6	1,90	4800
KCD150H50/3N	3000	150	151215	6	2,32	7300
KCD200H50/3N	3000	200	151220	6	2,73	9800
KCD300H50/3N	3000	300	151230	4	3,56	14800
KCD400H50/3N	3000	400	150640	4	4,39	19800
KCD500H50/3N	3000	500	150650	2	5,22	24800
KCD600H50/3N	3000	600	150660	2	6,05	29800

Connected products:

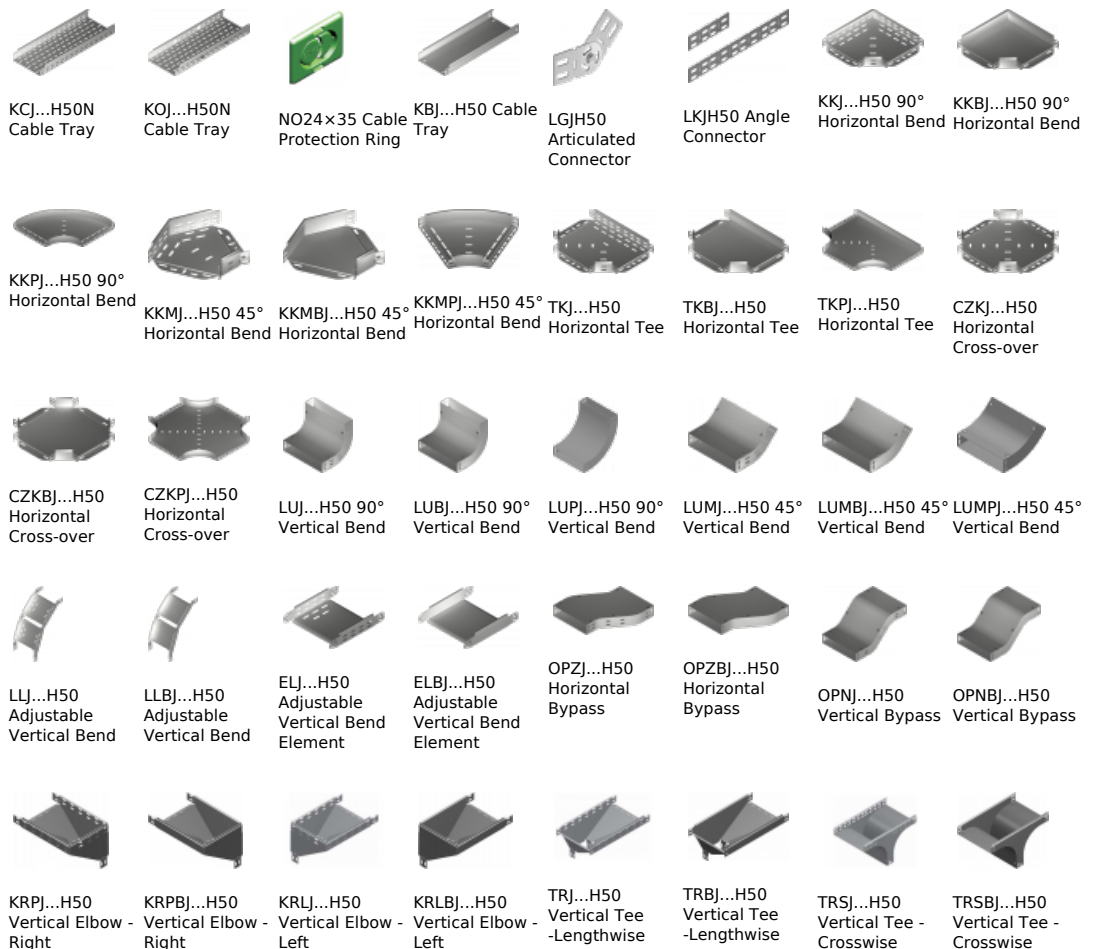

RKLJ...H50 Left
ReducerRKLBJ...H50 Left
ReducerRKPJ...H50 Right
ReducerRKPBJ...H50
Right ReducerRKSJ...H50
Straight
ReducerRKSBJ...H50
Straight
ReducerLRJH50 Corner
ConnectorLRBH50 Corner
ConnectorTKDJ...H50
Add-on TeeLRPJH50 Corner
Connector