

KOJ...H50N Cable Tray


Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. Available when ordering in large quantity are 2m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.




Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KOJ50H50/3N	3000	50	151605	12	1,15	2300
KOJ100H50/3N	3000	100	151610	12	1,49	4800
KOJ150H50/3N	3000	150	151615	6	1,84	7300
KOJ200H50/3N	3000	200	151620	6	2,17	9800
KOJ300H50/3N	3000	300	151630	4	2,82	14800
KOJ400H50/3N	3000	400	151040	4	3,51	19800
KOJ500H50/3N	3000	500	151050	2	4,18	24800
KOJ600H50/3N	3000	600	151060	2	4,85	29800

Connected products:

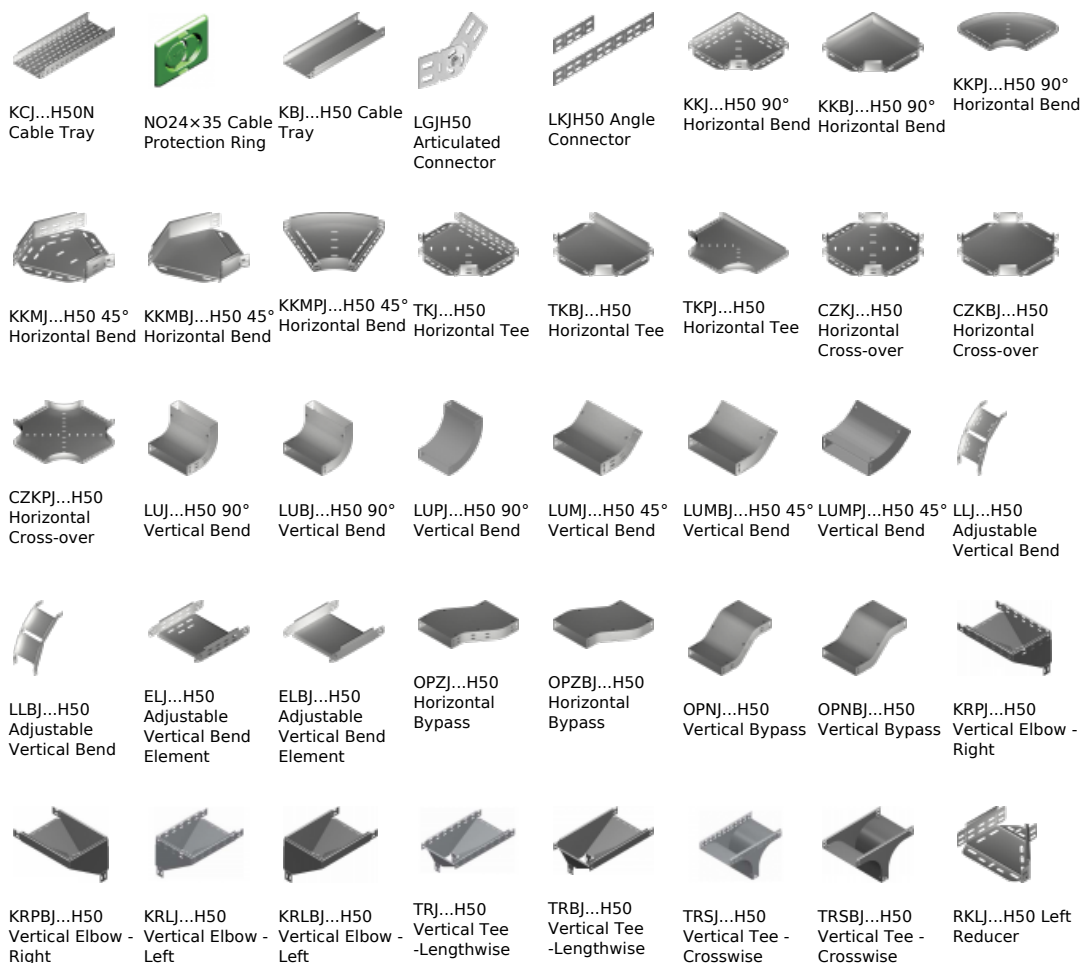



RKLBJ...H50 Left
Reducer



RKPJ...H50 Right
Reducer



RKPBJ...H50
Right Reducer



RKSJ...H50
Straight
Reducer



RKSBJ...H50
Straight
Reducer



LRJH50 Corner
Connector



LRBJH50 Corner
Connector



TKDJ...H50
Add-on Tee



LRPJH50 Corner
Connector