

## ZKDS... Beam Clamps Set


### Overview:

**Application**  
Suspending cable routes

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

**Beam Clamps Set ZKDS includes:**  
- 2pcs of Beam Clamp KDDS  
- proper-length section of Support Channel CWC40H40

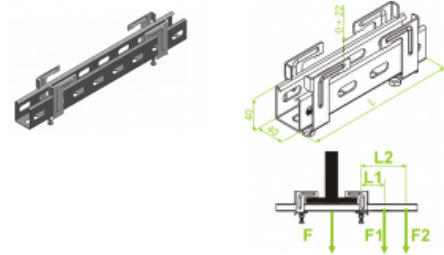

### Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]	Maximum load F1 [kN]	Maximum load F2 [kN]	A distance between the loaded area and the clamp L1	A distance between the loaded area and the clamp L1
ZKDS150	150	751415	10	0,60	3,80	0,00	0,55	100	200
ZKDS200	200	751420	10	0,70	3,30	0,00	0,55	100	200
ZKDS250	250	751425	10	0,80	3,00	0,00	0,55	100	200
ZKDS300	300	751430	10	0,90	2,70	0,00	0,55	100	200
ZKDS350	350	751435	10	1,00	2,50	0,00	0,55	100	200
ZKDS400	400	751440	10	1,10	2,30	0,00	0,55	100	200