

KCJ...H110N Cable Tray

Overview:


Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connectorfree assembly.

Available when ordering in large quantity are 2m and 6m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

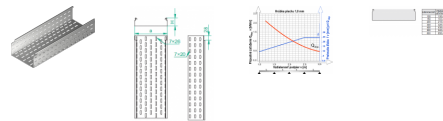

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KCJ100H110/3N	3000	100	120410	4	2,34	10800
KCJ100H110/6N	6000	100	120411	4	2,34	10800
KCJ150H110/3N	3000	150	120415	4	2,68	16300
KCJ150H110/6N	6000	150	120416	4	2,68	16300
KCJ200H110/3N	3000	200	120420	4	3,01	21800
KCJ200H110/6N	6000	200	120421	4	3,01	21800
KCJ300H110/3N	3000	300	120430	2	3,68	32800
KCJ300H110/6N	6000	300	120431	2	3,68	32800
KCJ400H110/3N	3000	400	120440	2	4,34	43800
KCJ500H110/3N	3000	500	120450	2	5,01	54800
KCJ600H110/3N	3000	600	120460	2	5,67	65800