

LKDH110 Angle Connector

Overview:

Application

Connecting cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

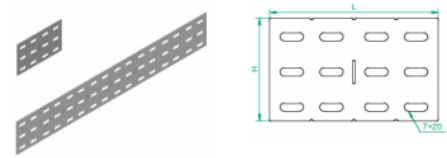

Use 12 Screw Sets SGK M6×12 or SG M6×12 to install
Optional bending or break-off of any required length

Versions:

Sheet thickness: **1,2 mm**

| Symbol | Length L [m] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. |
|-----------|--------------|------------------|-----------------|---------------|--------------|
| LKDH110 | 145 | 122700 | 50 | 98 | 0,13 |
| LKDH110/1 | 1000 | 122800 | 10 | 98 | 0,85 |