

LKDH110 Angle Connector

Overview:

Application

Connecting cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

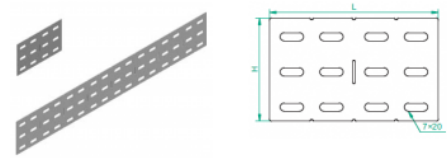

Use 12 Screw Sets SGK M6×12 or SG M6×12 to install
Optional bending or break-off of any required length

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
LKDH110	145	122700	50	98	0,13
LKDH110/1	1000	122800	10	98	0,85