

## LKDH110 Angle Connector

### Overview:

**Application**

Connecting cable routes.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

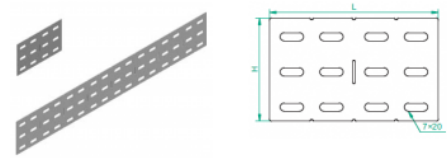

**Use 12 Screw Sets SGK M6×12 or SG M6×12 to install**  
**Optional bending or break-off of any required length**

### Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
LKDH110	145	122700	50	98	0,13
LKDH110/1	1000	122800	10	98	0,85