

## KKMBJ...H110 45° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

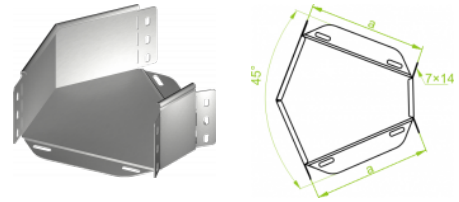

**For installation use Screw Sets SGK M6×12 or SG M6×12.**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBJ100H110	100	126310	10	0,40
KKMBJ150H110	150	126315	10	0,52
KKMBJ200H110	200	126320	10	0,75
KKMBJ300H110	300	126330	4	1,29
KKMBJ400H110	400	126340	4	1,84
KKMBJ500H110	500	126350	2	2,35
KKMBJ600H110	600	126360	2	3,12