

## KKMPJ...H110 45° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

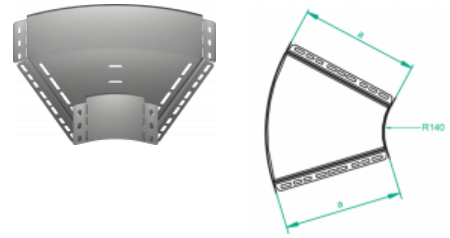

**For installation use Screw Sets SGK M6×12 or SG M6×12.**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ100H110	100	121514	10	0,50
KKMPJ150H110	150	121614	10	0,63
KKMPJ200H110	200	121714	10	0,77
KKMPJ300H110	300	121814	4	1,12
KKMPJ400H110	400	121914	4	1,53
KKMPJ500H110	500	122014	2	2,01
KKMPJ600H110	600	122114	2	2,53