

## KKMPP...H110 45° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

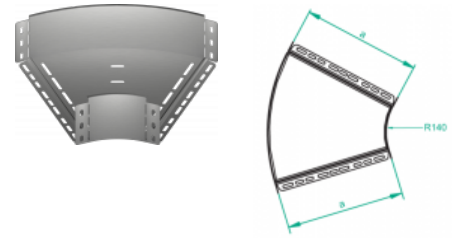

**For installation use Screw Sets SGK M6×12 or SG M6×12.**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPP100H110	100	122214	10	0,74
KKMPP150H110	150	122314	10	0,96
KKMPP200H110	200	122414	10	1,18
KKMPP300H110	300	122514	4	1,68
KKMPP400H110	400	122614	4	2,30
KKMPP500H110	500	122714	2	3,00
KKMPP600H110	600	122814	2	3,79