

TKJ...H110 Horizontal Tee

Overview:

Application

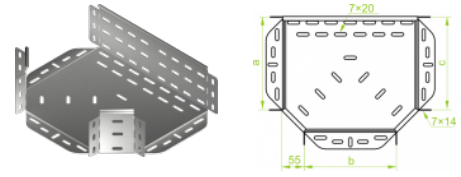
Branching out cable routes.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions: a, b, etc.

Versions:

 Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TKJ100H110	100	122510	10	0,67
TKJ150H110	150	122515	10	0,77
TKJ200H110	200	122520	10	1,09
TKJ300H110	300	122530	4	1,67
TKJ400H110	400	122540	4	2,75
TKJ500H110	500	122550	2	3,46
TKJ600H110	600	122560	2	4,75