

TKBJ...H110 Horizontal Tee

Overview:

Application

Branching out cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

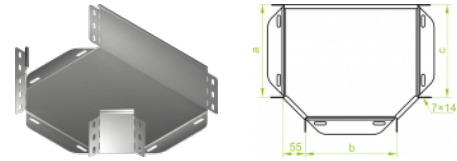

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions: a, b, etc.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TKBJ100H110	100	126510	10	0,67
TKBJ150H110	150	126515	10	0,77
TKBJ200H110	200	126520	10	1,09
TKBJ300H110	300	126530	4	1,67
TKBJ400H110	400	126540	4	2,75
TKBJ500H110	500	126550	2	3,46
TKBJ600H110	600	126560	2	4,75